

## INTRODUCTION

DTU AUV is a team of undergraduate students from the Delhi Technological University (Formerly Delhi College of Engineering). Our aim is to develop Autonomous Underwater Vehicles and Remotely Operated Vehicles of industrial standards. We participate and have won many accolades in competitions like RoboSub organized by AUVSI, MATE ROV, SAUVC, and various other national competitions. The vehicles are designed by fusion of research work in the field of mechanical engineering, electrical and electronics engineering, instrumentation, image processing, and acoustics.

The team structure is as follows:

FACULTY ADVISOR : **Dr. AJEET KUMAR**, Asst. Professor, Department Of Applied Physics, Delhi Technological University, Delhi, India

TEAM CAPTAIN : **SRIRAM CHAVA**, 3rd Year B.Tech Student, Department Of Electrical Engineering, Delhi Technological University, Delhi, India

TEAM MEMBER : **UTKARSH VERMA**, 3rd Year B.Tech Student, Department Of Mechanical Engineering, Delhi Technological University, Delhi, India  
(Team Role : Mechanical Department)

TEAM MEMBER : **SHIVANG DUDANI**, 3rd Year B.Tech Student, Department Of Electrical Engineering Delhi Technological University, Delhi, India  
(Team Role : Electrical And Embedded Department)

TEAM MEMBER : **SAURAV RANJAN**, 3rd Year B.Tech Student, Department Of Electrical Engineering, Delhi Technological University, Delhi, India  
(Team Role : Electrical And Embedded Department)

TEAM MEMBER : **SURYANSH GANGWAR**, 2nd Year B.Tech Student, Department Of Mechanical Engineering, Delhi Technological University, Delhi, India  
(Team Role : Mechanical Department)

# Design And Development Of A Remotely Operated Vehicle - Arkaja 2.0

Sriram Chava, Utkarsh Verma, Saurav Ranjan, Shivang Dudani, Suryansh Gangwar  
Delhi Technological University, Shahbad Daultapur, New Delhi-110042, India

## ABSTRACT:


Our team at the Delhi Technological University has made significant advances in developing Arkaja 2.0, our latest Remotely Operated Underwater Vehicle developed for AMU ROV. Successful long-distance serial communication through RS485 protocol and specially designed custom PCBs are the major developments for the embedded subsystem. This year, we also moved from the earlier cylindrical to a cuboidal hull, which led to easier debugging of the system, as it takes much less effort to access the electronics inside the hull. Overall, Arkaja 2.0 is the most compactly designed vehicle developed by our team, which is also robust and reliable for completing all the required tasks.

## I. COMPETITION STRATEGY

To successfully complete all the tasks special emphasis has been laid on controls and vision of the ROV. Along with that, the design has been made keeping in mind the parameters like mobility and dimensions. For the maneuvering task, Arkaja 2.0 has 6 thrusters ( Yaw, Depth, and Surge ) and 5 degrees of freedom. The communication lag between the vehicle and the shore is very less. For these reasons, we are expecting a high success rate for the first task. Arkaja 2.0 has two cameras; one at the bottom and the other at the front. Both the cameras have a high field of view which will enable us to see and touch the correctly marked balloon. Using depth control the vehicle can easily pass through the gate. For these reasons, we are expecting a high success rate for the vision and control task. The pressure sensor gives a continuous depth estimate of the vehicle and using this value a PID controller ensures that the vehicle always stabilizes at the correct height. With depth control, Arkaja 2.0 can maneuver through the first gate. As the second gate is half blocked, cameras will be utilized to find an opening for the vehicle so that it can proceed towards the balls. Arkaja 2.0 has a mounted net that can catch and hold the balls as the vehicle travels below the target zone.

## II. DESIGN RATIONALE

### A. MECHANICAL SYSTEMS

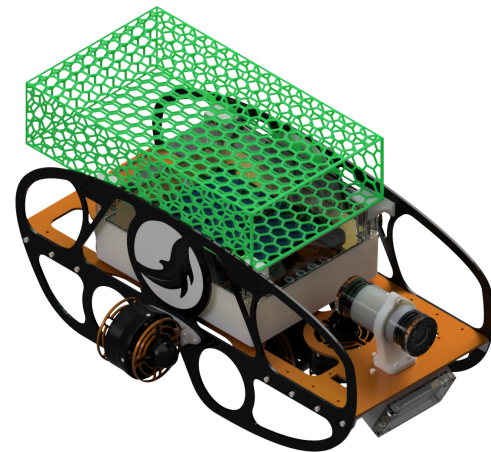


Arkaja 2.0



Manufactured Frame of Arkaja 2.0


## 1. Mechanical Frame

The design of the frame has been kept simple to minimize assembly time and weight while simultaneously providing more than enough structural strength to ensure the safety of hulls and thrusters. The frame is assembled using three sheet metal parts: base plate, left plate, and right plate. These three plates are secured using 3D printed ABS L-brackets. The material used for the frame is Aluminum 6061-T6 alloy, which has a density of 2700 kg/m<sup>3</sup>. This alloy was chosen for its low density compared to steel, good strength, and relatively lower cost of the material. The sheet metal is cut using water-jet cutting. This process is selected for its precision in cutting which ensures proper cutting of the frame's various irregular cavities and edges. The bottom plate houses the electronics hull, front camera hull, bottom camera hull, and 4 thrusters. The electronics hull is secured at the center using 3D printed hull brackets (attached to side plates), the front camera is also mounted using 3D printed mounts towards the front.

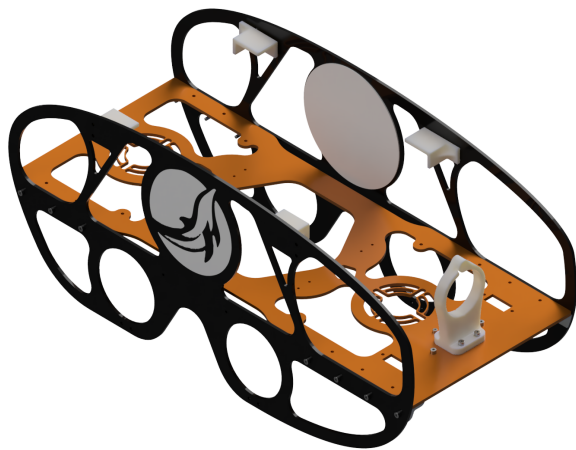


Mechanical Frame Of Arkaja 2.0


The frame of Arkaja 2.0 has sufficient rigidity and reliability. Upon structural analysis of the frame in Ansys software, the maximum stress generated in the frame was found to be well less than the yield stress of Aluminum 6061-T6 alloy.

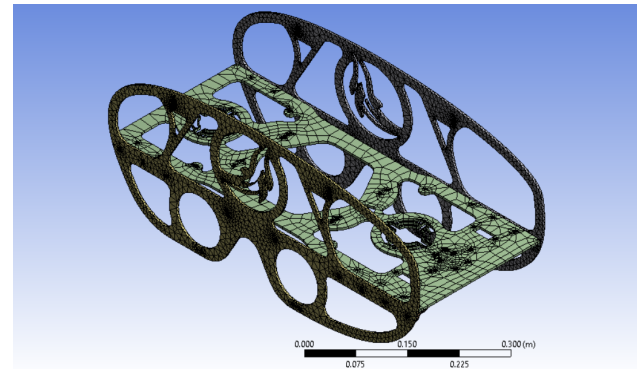

Mesh of Arkaja 2.0 frame generated in Ansys

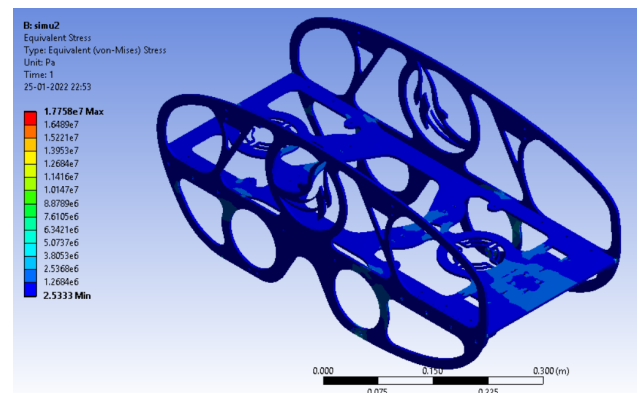

Von Mises Stress analysis of Arkaja 2.0 frame in Ansys

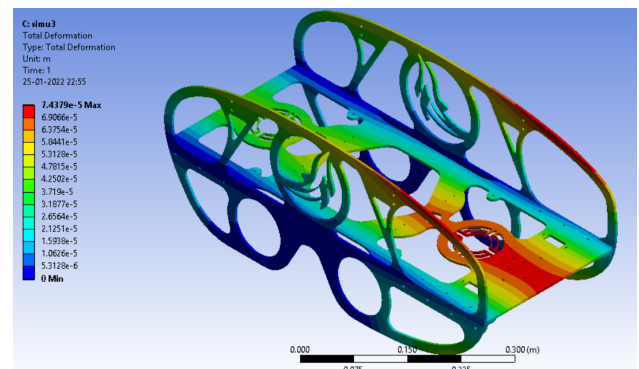

Deformation analysis of Arkaja 2.0 frame in Ansys


## 2. Waterproof Hulls

Arkaja 2.0 has two cuboidal and one cylindrical waterproof hulls housing onboard electronics and vision cameras.

*Electronics hull:* A cuboidal 1554YA2GYCL hull is used for housing the electronics stack of the roV. The base of the hull and the lid are made of polycarbonate. The hull also has 16 precisely cut holes of 10.2 mm diameter each

for mounting water-proof connectors. These holes provide a watertight passage for various wiring going from hull to thrusters and cameras along with wiring for power supply and onshore communications. A cuboidal hull provides an easier and space-efficient stacking of electronics such as PCBs and PDBs compared to cylindrical hulls. Also, since wiring connections come out of the hull body and not the lid, opening and closing of hulls are easier allowing faster debugging.

*Bottom camera hull:* The bottom camera of Arkaja 2.0 is housed inside a cuboidal 1554 C2 GYCL hull made of polycarbonate.

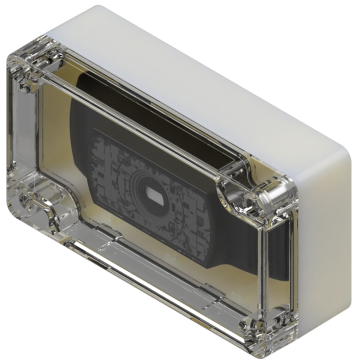

Bottom Camera with Hull

In both cylindrical hulls, a molded gasket with IP68 rating is being used to provide waterproof sealing.

*Front camera hull:* The front camera of Arkaja 2.0 is housed in an inhouse produced cylindrical hull having a clear acrylic body and end caps with Aluminum flanges. Waterproof sealing is ensured by sandwiching 4 radial O-rings between the inner hull wall and flanges and 2 facial O-rings between each flange and end cap.



Front Camera with Hull

### 3. Propulsion System


For the ROV, T-200 thrusters by Blue Robotics are used. A total of 6 thrusters are installed in the vehicle providing 5 degrees of freedom: surge, heave, sway, pitch and yaw. These 6 thrusters have a configuration as follows:

- (i) 2 heave thrusters are placed on the base plate to control the heave and pitch of the vehicle.
- (ii) 2 sway thrusters are placed on the bottom plate to control the sway and yaw of the vehicle.
- (iii) 2 surge thrusters are placed on the side Plates for controlling surge of the vehicle.

### 4. Ball Collection Net

For collecting the floating balls, a cuboidal net structure has been attached on the top of the ROV and secured on the left and right side plates of the frame via screws with washers. The net has been made inhouse using a single 98x45 cms sheet of hexagonal PVC mesh which has been cut and folded into a cuboidal shape.

PVC is lightweight, rigid and is an effective means for collection of the balls. The plastic nature of the material prevents the unfolding of the structure.

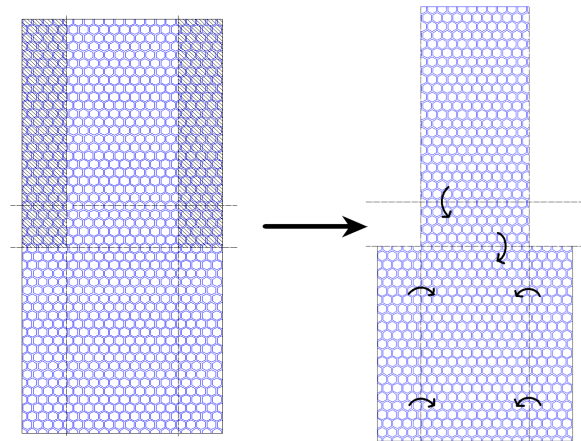

Process of making Net Structure

### 5. 3 D Printed Mounts

*Front camera mount:* In Arkaja 2.0 the front camera hull has been secured in a custom designed to mount 3 D

printed using ABS. It is a two-piece component having semi-circular prongs like extensions on each. Both the

prongs are joined together there at the free end by a screw and nut, making a circular opening in which the hull is inserted. In joint condition, the prongs press against the cylindrical wall of the hull and secure it in a position like a press fit. To release the camera, only removal of screws is required. This design makes assembly and disassembly easier and faster.




Front Camera Mount with Hull withdrawal

*Bottom camera mount:* The bottom camera hull has been installed on a custom made 3D printed ABS mount. The component has a two piece design in the shape of a fixed elbow. The piece directly fixed to the hull fixed in a slot shaped to position the camera hull at a 30 degrees incline downwards.




Bottom Camera Mount with Hull

We intend to use the bottom camera for preventing the vehicle from touching the pool floor and lower side of the half blocked gate in the ball collection task. Hence this particular tilt angle is chosen to keep the field of view of the camera (75 degrees) entirely in our region of interest which is the lower half of the region on the front side of the vehicle.

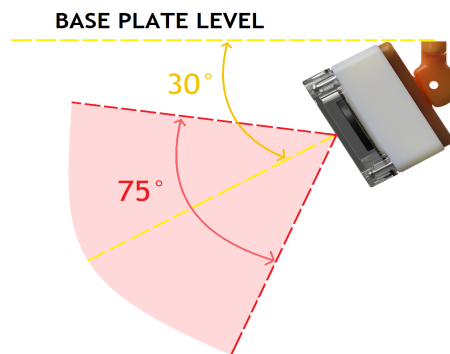


Orientation of Bottom Camera Hull with respect to Vehicle Baseplate and Camera Field Of View depiction

*Thruster Mounts and Shrouds Assembly:* Thruster mounts of Arkaja 2.0 are made by 3D printing ABS. These mounts are designed in a manner that combines thrusters and their shrouds as a single unit or subassembly. Thruster shrouds are protective mesh-like covers attached on both ends of the thruster nozzle. These subassemblies are easier and faster to install compared to shrouds being placed separately. Each surge and sway thruster has two shrouds attached with it while each heave thruster has one shroud, with the other inbuilt on the base plate.




Surge/Sway Thruster with Mount and Shrouds



Heave Thruster with Mount and Shroud

## B. ELECTRICAL AND EMBEDDED DEPARTMENT

The main power comes to our ROV from the 48V power supply through XT60 connectors. Then, 12 AWG Silicone wires carry this power through a Double Pole Single Throw (DPST) Kill switch to a 25A inline fuse as per safety regulations. From the fuse, we get two output wires which go into the tether and then inside the ROV. These wires then go into the power distribution board (PDB) powering the microcontroller, all the sensors, and the thrusters. The microcontroller along with the sensors and rs485 transceiver are connected to each other on a single PCB, this reduces the wiring and makes the system more modular. The electronics department also designed the algorithm for communication with the vehicle from the shore using the RS485 protocol.

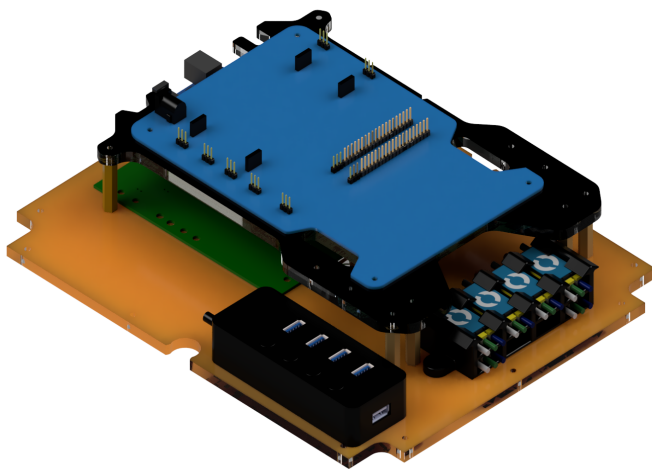


Electronic Assembly in Arkaja 2.0

### 1. Power Distribution System

A PCB was specifically designed and manufactured for the purpose of Voltage conversion from 48V to 12V and also for Power distribution. A 48-12V quarter-brick converter was implemented for voltage conversion because of its high output power (900W) and compact size. The quarter-brick converter is mounted on the PDB. The PDB has outputs for ESC's (Electronic Speed Controller), microcontroller PCB, and for the USB hub used in the imaging system. The outputs for ESC's from the PDB are combined into a single output and then are fed into the microcontroller PCB (Arduino Mega Shield).

On the microcontroller PCB, the input 12V power is split into 6 outputs for 6 ESCs. One 12V rail is stepped down to 5V to power the Arduino Mega.

The cameras through the USB hub are powered using another 12V rail which is stepped down to 5V. The trace widths were chosen using the IPC recommended trace width chart. PDB reduced a lot of wiring and the electrical system became much more manageable. Fault detection and debugging also became quicker due to the introduction of a PDB.

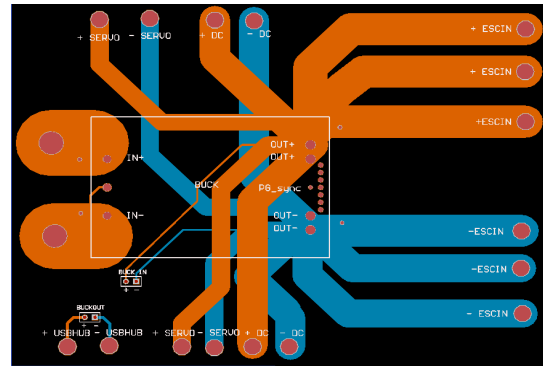

Power Distribution Board schematic



Power distribution board

S.No	Component	Current rating	Operational Voltage
1	Thruster	6A	12V
2	Arduino	0.6A	5V
3	Pressure Sensor	1.25mA	5V
4	Camera	0.5A	5V

Operating requirements of various major components in Arkaja 2.0

$$I_{Tot} = \Sigma(I_{Drawn} \times N)$$

$$(6 \times 5) + 0.6 + 0.00125 + 0.5 \times 2 + 0.0005 \times 2 =$$

$$31.6002 \text{ A (Total maximum current drawn)}$$

$$I_{Over} = I_{tot} \times 1.5$$

$$= 50.55 \times 1.5 = 47.4033 \text{ A}$$

$$I_F = 25 \text{ A (Rating of the fuse)}$$

$$P_{Tot} = \Sigma(V_{Load} I_{Drawn} N)$$

$$= (72) \times 6 + 3 + 0.00625 + 5 + 0.005$$

$$= \mathbf{440.0112 \text{ W (Total maximum power Consumed)}}$$

## 2. DC-DC Converters

*UBEC*: 12V - 5V, 3A UBEC converter is used for supplying power to the USB hub. The USB hub powers up a Logitech C390e camera and a Microsoft camera. There is no need for any heat sink or forced cooling. Another buck converter is utilized for powering the Arduino from the 12V rail.

*Quarter Brick Converter* : A 48V - 12V High power (900W) quarter-brick converter BMR4800102 from Flex Power Modules is implemented in our system. It has a high-temperature tolerance of 125 C and is extremely compact. With features like adjustable output, Overvoltage protection, over-temperature protection, inbuilt baseplate helping in cooling the brick, and an efficiency of 96.9% made this quarter buck the best choice for our application.




Quarter brick BMR4800102

## 3. Kill Switch

A generic double pole single throw switch is used as the killswitch. The switch is connected to the input of the 48 - 12V buck converter and is used to deactivate the power circuitry of the vehicle in case of an emergency or critical failure.

## 4. Control System


*Microcontroller* : Arduino boards were used because of their open-source AVR microcontroller-based development which can be programmed easily. Specifically, Arduino MEGA (2560) 32-bit was used because it has several analog-digital and serial communication pins for sensors, motors, and other actuators.

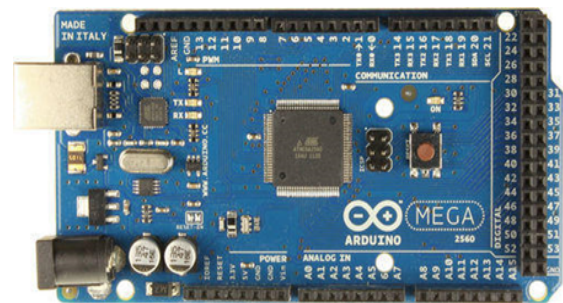


Arduino Mega

A microcontroller PCB (Arduino Mega shield) was designed to mount the Arduino and attach all the sensors to it. The PCB has ports for different components like the RS485 transceiver, logic level converter for the pressure sensor, 6 ESC's, temperature, current and voltage sensors. The shore RS485 transceiver is connected via an ethernet cable with the RS485 board in the vehicle. This reduces the amount of wiring required and also allows easy debugging. It also has power outputs to run 6 BlueRobotics T200 thrusters.

The PCB also allows the connection of an additional Arduino Mega motor shield if extra pins are required. The current, temperature, and the voltage sensor are useful for debugging the electronic stack in case of a fault.

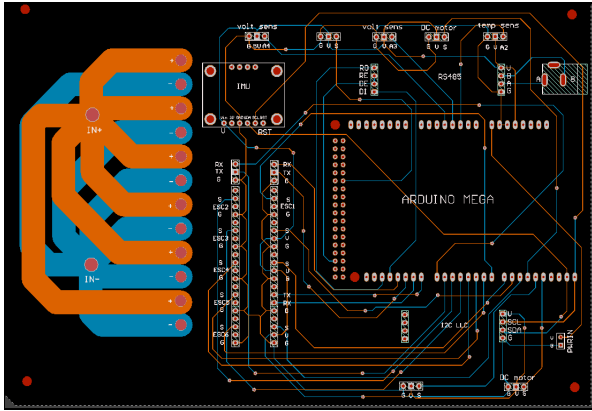

Microcontroller PCB Schematic

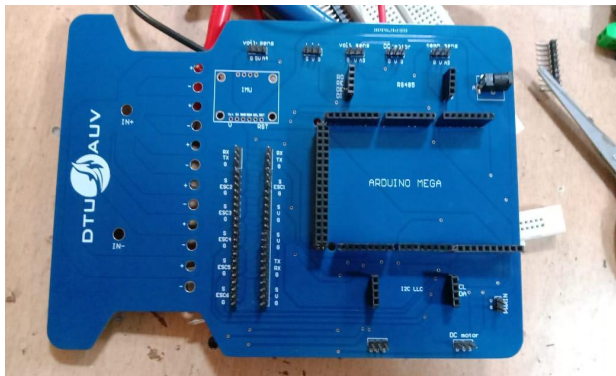

Microcontroller PCB

**Controller :** On the surface, we have a Redgear gaming controller connected to the laptop. This controller serves as the entire control unit for the ROV. It is connected with an Arduino UNO board and an operator can give commands to the ROV via RS485 communication.

**PID Controller :** For tasks requiring depth stability, A PID loop has been implemented. For the depth sensing, we have employed BlueRobotics Bar30 Pressure Sensor, connected to the Arduino via logic level converter on the microcontroller PCB. The required depth value can be

changed using the controller and this required depth value is the target value for the PID loop

## 5. Tether

For our tether we utilized 10mm diameter and 10m length Spiral Wrapping Band by robu.in. It is very flexible and durable and allows wire breakout at any point, it is quick and easy to apply and remove. The wires inside the tether are 4mm copper diameter and two ethernet CAT 6 cables for image and control signals respectively.

*Power loss :*

$$R_{\text{Copper}} = 4.3 \text{ Ohm/km}$$

$$L_{\text{Tether}} = 15\text{m} \times 2$$

$$R_{\text{Total}} = R_{\text{Copper}} \times L_{\text{Tether}} \text{ ( Total resistance of the cable )}$$

$$= 4.3 \times 30/1000 = 0.129 \text{ Ohms.}$$

$$V_{\text{Drop}} = I_F \times R_{\text{Total}} \text{ ( Voltage drop in the tether )}$$

$$= 0.129 \times 25 = 3.225\text{V}$$

$$P_{\text{Drop}} = I_F^2 \times R_{\text{Total}} \text{ ( Power loss due to tether resistance )}$$


$$= 0.129 \times 25 \times 25 = 80.625 \text{ W}$$

$$\eta_{\text{Cable}} = ( P_{\text{Tot}} - P_{\text{Drop}} ) / ( P_{\text{Tot}} ) = 86.042 \% \text{ (Efficiency of the cable)}$$

## 6. Imaging System

Two high FOV cameras are being used, namely C930e Logitech and Microsoft Live Cam for vision, one covers the front view and the second one covers the bottom view. The cameras derive their power from a USB hub which is in turn powered by the PDB using the 12V-5V UBEC. The image feed of the two cameras is carried over to the shore using a single ethernet CAT 6 cable. The image is processed on the shore on a PC. We can switch between the front and the bottom cameras. This gives us the capability to perform different tasks and maneuver the vehicle while avoiding various obstacles.



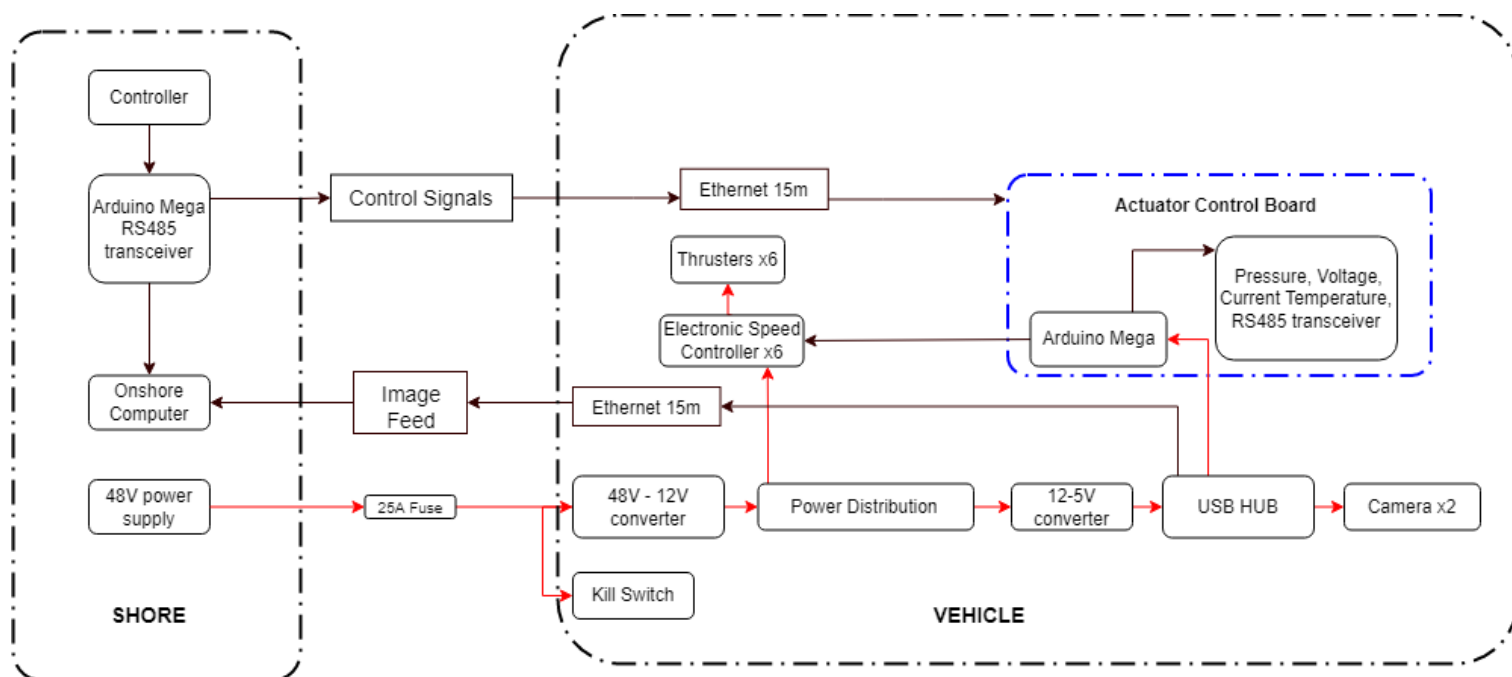

Hardware architecture of Arkaja 2.0

### III. ACKNOWLEDGEMENTS

We would like to thank and express gratitude to everyone who contributed to the completion of our project. We'd like to thank our Faculty Advisor, Mr. Ajeet Kumar, for his helpful guidance throughout the duration of this project. We would also like to thank our experienced and knowledgeable DTU AUV alumni network whose advice in matters like management of the scheduled timeline of our project and design considerations, assisted us in working efficiently. Finally, we would like to thank our sponsors - - Bulgin, 3D paradise, Xsens, Vectornav, Hitec, Solidworks, Adani, Ion exchange, Blue robotics, Total phase, Protocase, Fischer, Mathworks, SubCtech, RJE, Altium, Ansys - for helping us financially and aiding us with important tools and resources, which was essential for completion of this project

### IV. REFERENCES

- [1] Ahmed, Yasser & Yaakob, Omar & Sun, Bong. (2014). Design of a new low cost ROV vehicle. *Jurnal Teknologi*. 69. 10.11113/jt.v69.3262.
- [2] Mohd Aras, Mohd Shahrieel & Teow, B.P. & Teoh, A.K. & Lee, P.K. & Kassim, A.M. & Harun, Mohamad Haniff & Zambri, M.K.M. & Khamis, Alias. (2017). Evaluation and analysis of pid and fuzzy control for auv-yaw control. *Journal of Theoretical and Applied Information Technology*. 95. 4256-4264.
- [3] Abdul Azis, Fadilah & Mohd Aras, Mohd Shahrieel & Rashid, M.Z.A. & Othman, Muhammad Nur & Abdullah, S.. (2012). Problem Identification for Underwater Remotely Operated Vehicle (ROV): A Case Study. *Procedia Engineering*. 41. 554-560. 10.1016/j.proeng.2012.07.211.
- [4] A. Kenge and A. Mali, "Design and Analysis of Underwater Remotely Operated Vehicle," 2019 International Conference on Nascent Technologies in Engineering (ICNTE), 2019, pp. 1-5, doi: 10.1109/ICNTE44896.2019.8945851.
- [5] Muhamad Fadli Ghani (Author), 2012, Design and Fabrication of ROV (Remotely Operated Underwater Vehicle) for Underwater Exploration, Munich, GRIN Verlag,

## V. APPENDIX

## APPENDIX A: COMPONENT SPECIFICATIONS AND BUDGET

Component	Vendor	Model/Type	Specs	Cost
Buoyancy Control	NA	NA	NA	NA
Frame	In House	Plane truss structure 3D printed attachments	4mm Aluminum 6061 T6 sheets 3D Printed ABS	11,163₹ 6,045₹
Waterproof Housing	Hammond Hammond	1554YA2GYSL 1554C2GYCL	IP68 rated, Polycarbonate IP68 rated, Polycarbonate	8,037₹ 2,000₹
Waterproof Connectors	Blue robotics	Potted Cable penetrator	Quantity: 20,M-10 thread, 6mm cable	7442₹
Thrusters	Blue robotics	T200	Quantity: 6,Operating Voltage:7-20V, Full Throttle Current(@20V):32A	1,06,570₹
Motor Control	Blue Robotics	ESC for T200	Quantity:8,7-26 volts (2-6S)	16,074₹
High-Level Control	Arduino	Mega 2560	6-20V,54 digital I/O pins,16 analog pins, Clock speed:16MHz	1,808₹
Vision	Logitech Microsoft	C930E Lifecam HD 3000	Full 1080p HD video at 30 frames per second Full 720p HD video at 30 frames per second	9,700₹ 1,742₹
Regulator I	Robu	LM2596S	Quantity : 1, Input Voltage : 3-40V, Output Voltage : 1.5-35V(Adjustable) Output Current : 2A	120₹
Regulator II	Robu	Bluesky Mini	Quantity 1 Input Voltage : 7-25V Output Voltage : 5V (constant) Output Current : 3A	260₹
Pressure sensor	Blue Robotics	BAR30	300m depth	5,360₹
Current sensor	Robu	ACS712	Measure Current Range: -30A ~ 30A	150₹
Voltage sensor	Robu	Voltage detection sensor module	Voltage detection range: 0.02445V - 25V DC	82₹

Temperature Sensor	Adafruit	MCP9808	Temperature range : -40 C - 125 C	372₹
RS485 Transceiver	Maxim	MAX485	Quantity = 2 Max Speed = 2.5Mbps Current Draw = 120 uA	372₹
Testing time: in-water	7 hours			
Inter-vehicle communication	RS485 Protocol			
Programming Language(s)	C/C++			

## APPENDIX B: OUTREACH ACTIVITIES

Each year DTU AUV attends and organizes many workshops to reach out to the community. Through these exhibitions, DTU-AUV tries to reach young and insightful minds to take up robotics. for applications in practical decision-making. In this workshop, the basics of modern AI, as well as some of the representative applications of Artificial Intelligence, were covered. The team believes in spreading awareness about what advancements are taking place in the fields of science and technology. Every year we conduct a number of school workshops to promote such activities and also give school students a sight of exactly what kind of environment they face when they go for higher studies.

The team organized a Machine Learning and Artificial Intelligence Workshop. The program implemented a well-researched plan to spread AI talent at global tech hubs.



Presenting our vehicle to Hon'ble Chief Minister:- Arvind Kejriwal



Workshop organized for school students



ML and AI workshop organized by DTU-AUV

We have organized workshops in collaboration with NGOs to provide an opportunity to students with limited means to develop a knack for science, enhance their problem-solving abilities, analytical thinking and practical skills to support their intellectual growth



Tricky circuit competition organized by DTU AUV



Workshop organized for students with limited means



Workshop organized in RP public school, Rohini